

## AUTO RAISED PANEL DOOR MACHINE



LH-1000-AT




### Stackable Spindle

Locates to different cutter location at the touch of a switch, eliminating all set-up time. Brazed or insert tooling is available.



### Door Templates

Includes 4 panel arches and 4 matching rails for different door size by simply lowering the roller to the required template level, and then an arched panel or rail can be produced.

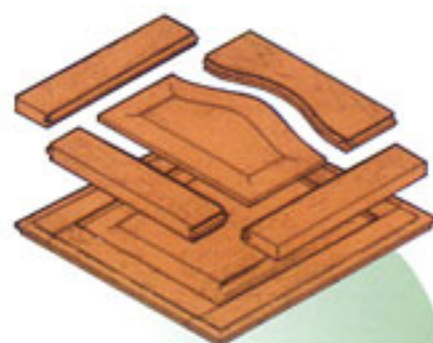

All 5 components of a raise panel door can be produced in less than 5 minutes by 1 operator!

Model	LH-1000-AT	LH-1400-AT	LH-2200-AT
Main spindle driving power	7.1/2HP	10HP	18HP
Pump motor	1 HP	1 HP	1 HP
Main spindle revolving speed	9000 r.p.m	9000 r.p.m	9000 r.p.m
Main spindle dia.	Ø 1-1/4" (30m/m)	Ø 1-1/4" (30m/m)	Ø 1-1/4" (40m/m)
Driven wheel dia.	Ø100 m/m	Ø100 m/m	Ø100 m/m
Max. working length	1000 m/m	1400 m/m	2200 m/m
Machine size	1950x950x1450m/m	2350x950x1450m/m	3500x950x1450 m/m
Packing size	2030x1000x1600m/m	2450x1000x1600m/m	3930x1200x1700 m/m
N.W. / G.W.	950/1150kgs	1020/1220kgs	1520/1720kgs