
EDGE

TGL-TGS

Sanding line





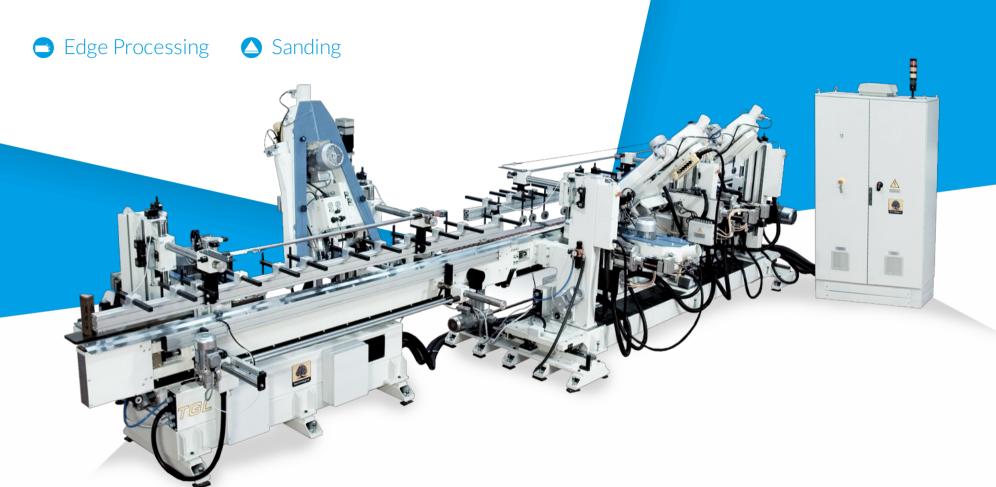

TGL-TGS

Sanding line

Maximum working precision



i≡

- Line composed of two single-sided machines, one fixed, one mobile. Suitable for sanding very short elements, or
- door elements, or fixture components. Great stability,
 extreme accessibility, maximum working precision, quick setup, thanks to the second mobile machine. 90 mm wide track transport system, pressure unit with double rows of wheels allow easy and precise process.
 Configurable with a wide range of milling and sanding groups, unique in their kind. Electrical controls throughout the machine length. Operator panel with large touch-screen display.
- Suitable to work door profiles, fixture profiles
- √ 90 mm track transport system, stable and safe
- ✓ Production speed up to 25 m/min, versions up to 50 m/min
- Pressure units with rubber wheels, adjustable in width and height
- Extremely sturdy
- ✓ Wide range of operating groups, both milling and sanding, unique in their kind



TGL-TGS

Makor Srl

Via Casalpiano, 9 53048 Sinalunga Siena Italy

(+39) 0577 634011 makor@makor.it



https://makordev.swa-creative.com/staging/en/product/tgl-tgs/